



## **RCPA**, the Australian Pipe Company, is the leading manufacturer of Vertically Cast Concrete Pipes in Australia.

The dry-cast pipe making process was introduced to Australia by RCPA and has been in use for two decades. Vertically casting is the most efficient method of pipe manufacture available.

Benefits of RCPA SRC Pipes;


- Rapid production rates
- Pipes comply with AS/NZS 4058:2007
- Precision Manufacturing technology
- Low impact and sustainable process



THE AUSTRALIAN PIPE COMPANY

# SRC PIPE

## Rubber Ring Joint

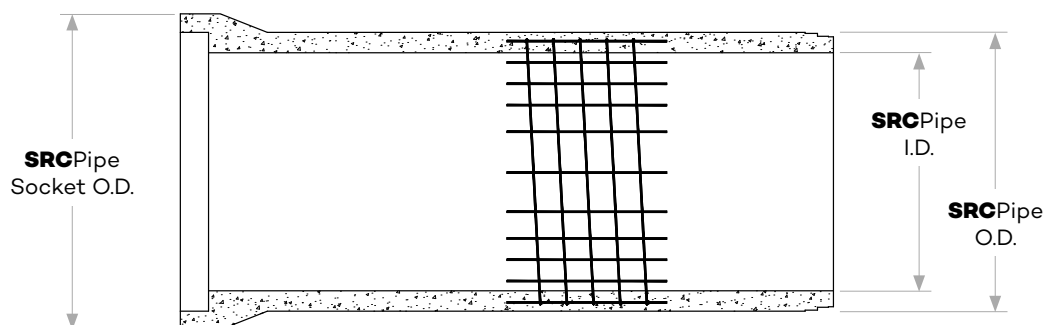


Nom. ID (mm)	Pipe ID (mm)	Socket OD (mm)	Pipe OD (mm)			Weight (kg)		
			Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
225	220	370	-	-	298	-	-	210
300	295	455	-	-	371	-	-	260
375	370	546	-	-	452	-	-	340
450	445	643	545	545	545	500	500	500
525	520	734	627	627	660	620	620	800
600	595	825	708	708	726	750	750	860
675	670	913	790	790	850	890	900	1300
750	745	1005	878	878	905	1080	1090	1290
825	820	1094	960	960	1008	1230	1230	1630
900	895	1185	1048	1075	1075	1470	1710	1730
1050	1045	1344	1198	1235	1235	1750	2160	2160
1200	1195	1532	1368	1405	1405	2280	2720	2720
1350	1345	1690	1528	1564	1564	2680	3220	3240
1500	1495	1910	1680	1730	1730	3240	3890	3920
1650	1645	2056	1840	1935	1935	3600	5020	5040
1800	1795	2226	1995	2105	2105	4100	5870	5900
1950	1945	2390	2260	2260	2260	6500	6500	6500
2100	2095	2556	2300	2400	2400	5000	6770	6790
2400	2395	2920	2730	2730	2730	8700	8700	8700
2700	2695	3250	3050	3050	-	10800	10800	-
3000	2995	TBA	TBA	TBA	TBA	TBA	TBA	TBA
3300	3295	TBA	TBA	TBA	TBA	TBA	TBA	TBA
3600	3595	TBA	TBA	TBA	TBA	TBA	TBA	TBA

\*Dimensions and weights subject to change

- Effective length = 2340mm
- Rubber rings supplied with all pipes
- Other classes available on request
- Pipes listed above conform with AS/NZS 4058:2007 for normal environment exposure conditions
- Marine or aggressive environment pipes available upon request

# SRC PIPE

## Flush Joint

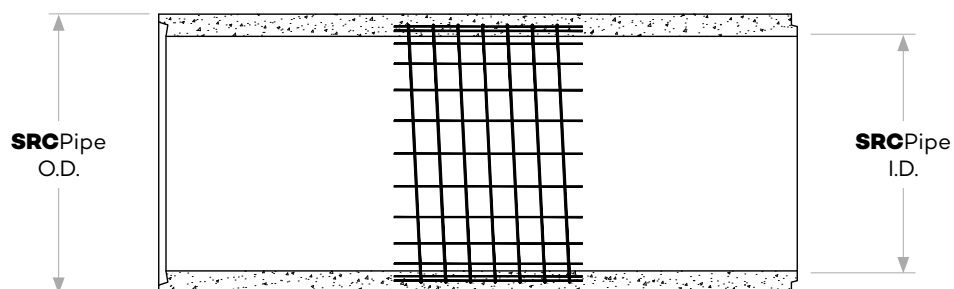

Nom. ID (mm)	Pipe ID (mm)	Pipe OD (mm)			Weight (kg)		
		Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
300	295	-	-	378	-	-	250
375	370	-	-	455	-	-	310
450	445	542	542	542	420	420	420
525	520	625	625	650	530	530	670
600	595	706	706	726	640	650	780
675	670	791	791	855	790	790	1270
750	745	874	874	906	940	940	1200
825	820	961	961	1005	1130	1140	1530
900	895	1046	1046	1076	1320	1320	1630
1050	1045	1195	1238	1238	1530	1980	2010
1200	1195	1356	1396	1396	1900	2360	2370
1350	1345	1520	1580	1580	2280	2810	2850
1500	1495	1680	1730	1730	2710	3470	3480
1650	1645	1830	1910	1910	3020	4290	4320
1800	1795	1990	2080	2070	3550	4980	5000
1950	1945	2260	2260	2260	6230	6230	6230
2100	2095	2334	2400	2400	4750	6180	6260
2400	2395	2730	2730	2730	8070	8070	8070
2700	2695	3050	-	-	9570	-	-
3000	TBA	TBA	TBA	TBA	TBA	TBA	TBA
3300	TBA	TBA	TBA	TBA	TBA	TBA	TBA
3600	TBA	TBA	TBA	TBA	TBA	TBA	TBA

\*Dimensions and weights subject to change

- Effective length = 2340mm
- Sealing bands available on request
- Other classes available on request
- Pipes listed above conform with AS/NZS 4058:2007 for normal environment exposure conditions
- Marine or aggressive environment pipes available upon request



**1800 88 RCPA (7272)**  
[rcpa.com.au](http://rcpa.com.au)  
Issue: Mar 2022



THE AUSTRALIAN PIPE COMPANY